


INSTRUCTIONS FOR MAINTAINING A GREASE TRAP


1. Gently squeeze the legs of the frame and lift it out of the tray.

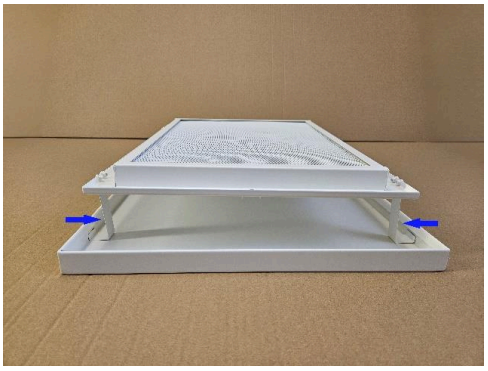

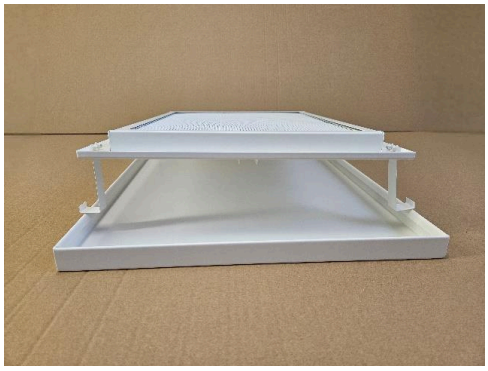

2. On the bottom of the frame, rotate the brackets and remove the filter.

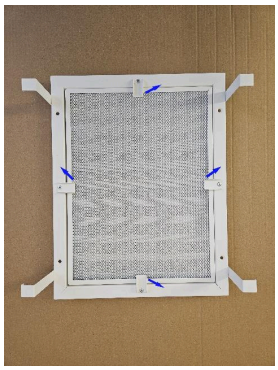

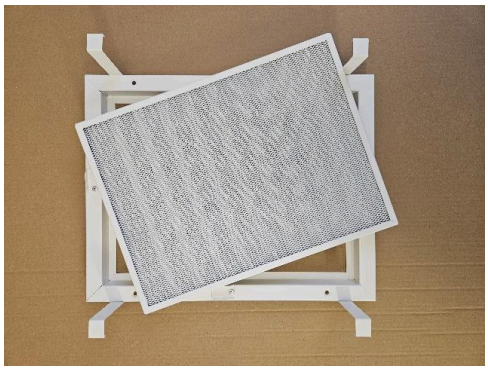

3. Clean the filter and tray with a degreaser or place them in the dishwasher. Once the parts are dry, reassemble them.