


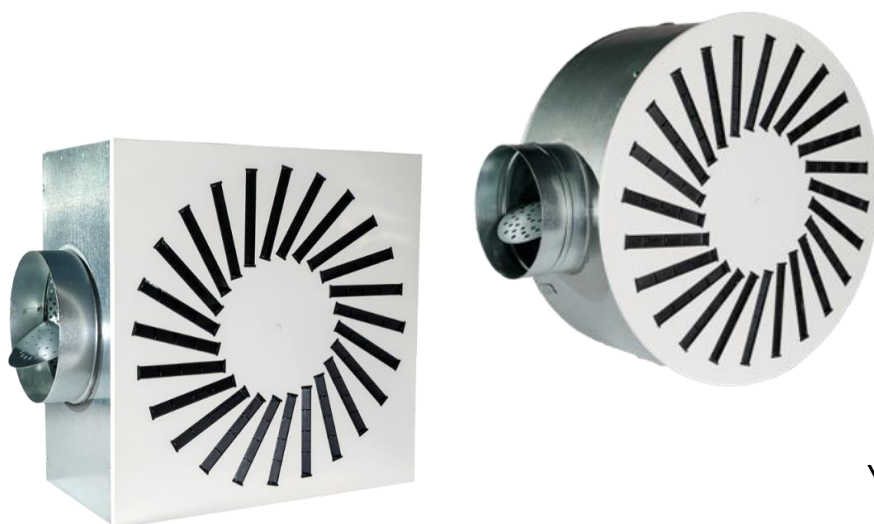

VD-2

VRTINČNI DIFUZOR SWIRL DIFFUSER

OPIS:

Vrtinčni difuzor VD-2 z nastavljivimi usmerjevalniki zraka je namenjen prezračevanju nizkih prostorov višine od 2,6 m do 4 m. Primeren je za vgradnjo v spuščene strope.

KONSTRUKCIJA:

- kvadratni ali okrogli difuzor
- plastični usmerniki zraka
- okrogla razporeditev usmernikov

MATERIAL: jeklena pločevina

BARVA: bela barva RAL 9010 MAT ali poljubna barva po RAL lestvici

MONTAŽA: pritrditev z enim centralnim ali štirimi stranskimi vijaki na komoro tipa PB-2

DESCRIPTION:

The VD-2 swirl diffuser with adjustable air diffusers is designed for ventilating low-rise rooms from 2.6 m to 4 m high. It is suitable for installation in dropped ceilings.

CONSTRUCTION:

- square or round diffuser
- plastic deflectors
- radial deflector arrangement



MATERIAL: steel sheet metal

FINISH: RAL 9010 MAT white, or any colour from the RAL palette

INSTALLATION: with one central or four side screws on the plenum box PB-2

DIMENZIJE / DIMENSIONS:

	D	Ø D	D1	Ø D2		H		A
310/8	305	310	301	158		230		275
400/16	395	400	391	158	198	230	270	365
500/16	495	500	391	158	198	230	270	365
600/16	595	600	391	158	198	230	270	365
625/16	620	625	391	158	198	230	270	365
500/24	495	500	491	198	248	270	320	450
600/24	595	600	591	198	248	270	320	550
625/24	620	625	591	198	248	270	320	550
600/48	595	600	591	248		320		565
625/54	620	625	616	248		320		590
800/72	795	800	791	313	348	385	420	765

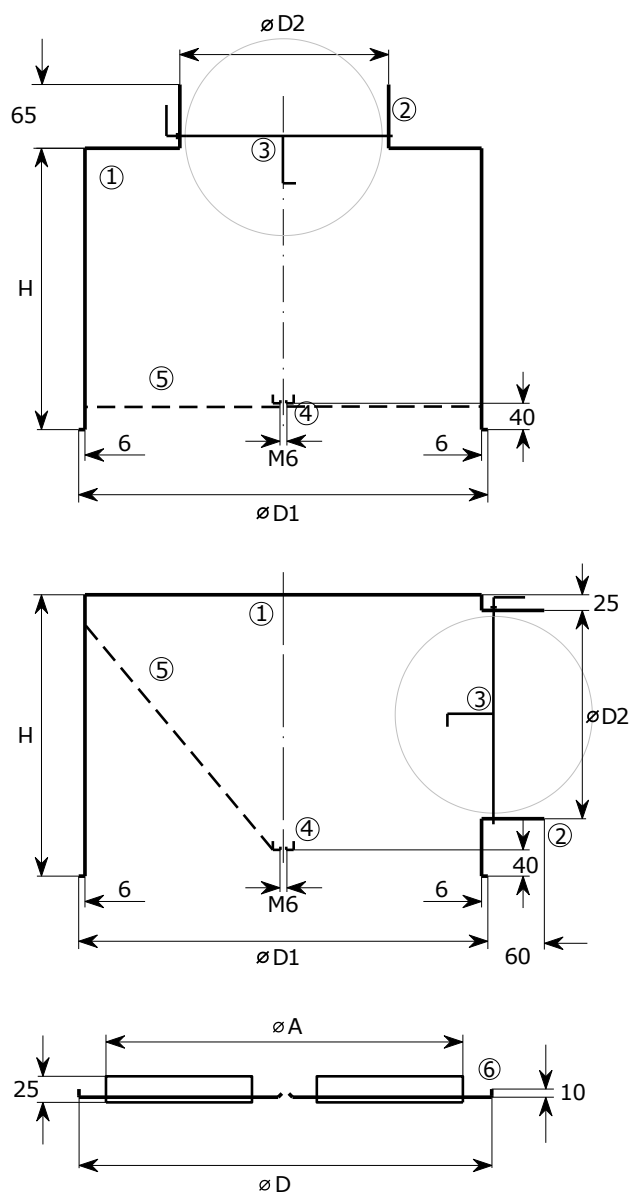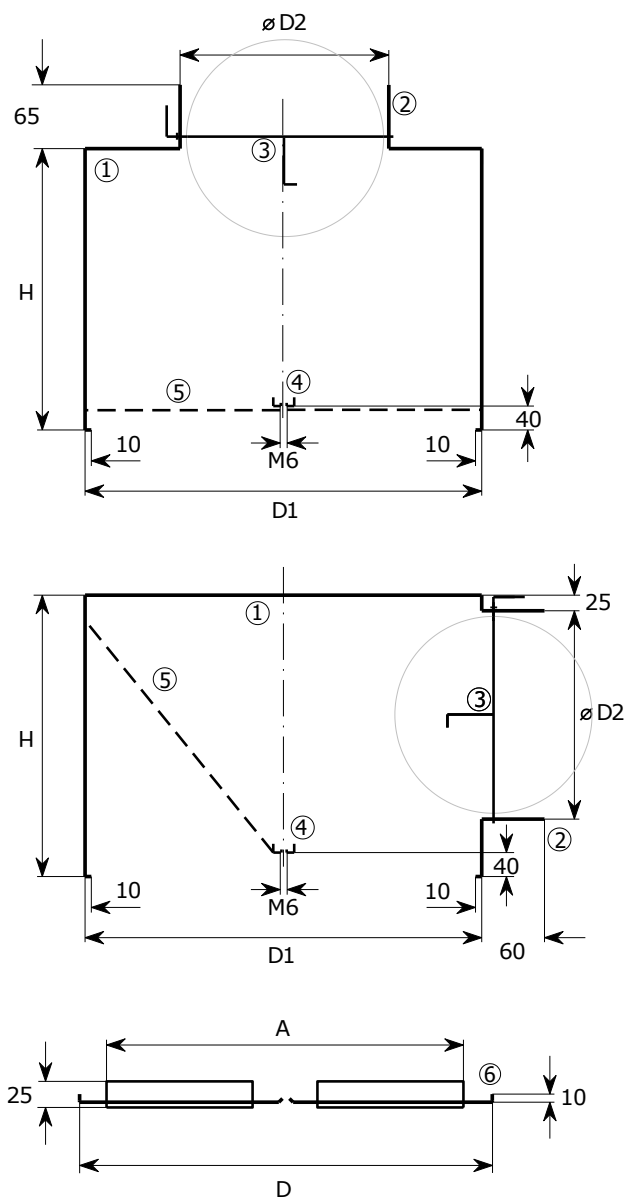K- kvadratna / square**R-** okrogla / round

1. komora PB-2 / plenum PB-2
2. okrogla priključna odprtina / round connection opening
3. regulacijska loputka / volume control damper
4. prečka / traverse
5. perforirana razpršilna plošča (samo za dovod) / dispersing plate (for supply only)
6. difuzor / diffuser


**OBLIKE DIFUZORJEV IN RAZPOREDITEV USMERNIKOV:
SHAPES OF DIFFUSERS AND DEFLECTOR ARRANGEMENTS:**

K**R**



dim 310/8





dim 400/16, 500/16, 600/16, 625/16





dim 500/24





dim 600/24, 625/24





dim 600/48




dim 625/54



dim 800/72

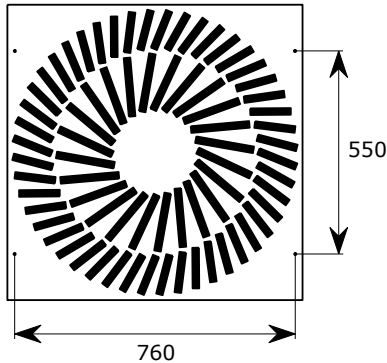

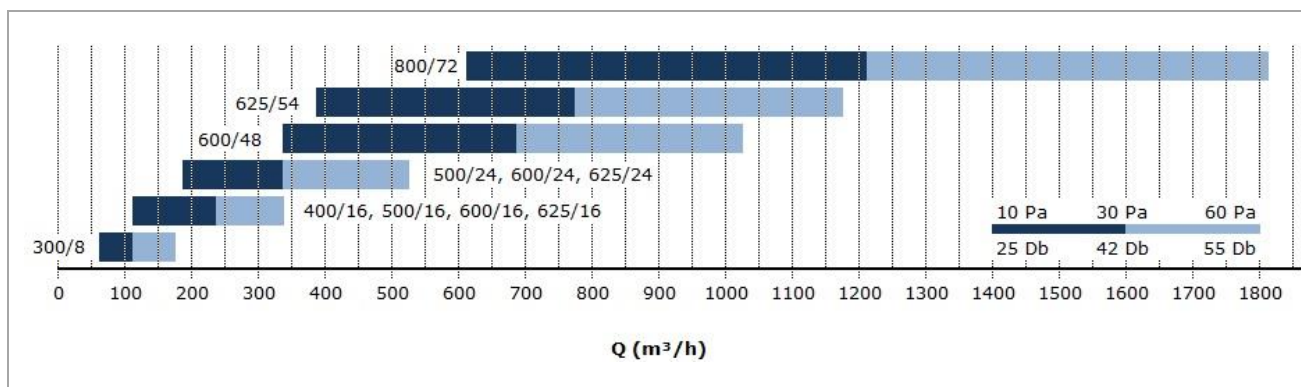HITRA IZBIRA / FAST SELECTION:**NAČIN NAROČANJA / HOW TO ORDER:**

VD-2	K	600	/	24	RAL 9010 MAT	Z	PB-2	PP	600	/	198	H	ISO 6mm
													izolacija / insulation 6 mm, 10 mm, 19 mm pozicija priključka position of connection H – horizontalen / horizontal V- vertikalni / vertical priključek / connection opening standard poljuben / optional dimenzija komore / plenum dimension perforirana razpršilna plošča / dispersing plate komora / plenum PB-2 komora / plenum smer vpiha / direction of air Z - dovod / supply A - odvod / exhaust
													barva / colour standard RAL 9010 MAT poljubna / optional št. usmernikov / No. of deflectors 8, 16, 24, 48, 54, 72 dimenzija difuzorja / diffuser dimension 300, 400, 500, 600, 625, 800 oblika / shape K - kvadratna / square R - okrogla / round tip difuzorja / diffuser type