



VD-5

VRTINČNI DIFUZOR SWIRL DIFFUSER

OPIS:

Vrtinčni difuzor VD-5 je namenjen prezračevanju nizkih prostorov višine od 2,6 do 4 m. Primeren je za vgradnjo v spuščene stropne.

KONSTRUKCIJA:

- kvadraten ali okrogel difuzor
- fiksne lamele
- okrogla razporeditev lamel
- usmerjevalni obroč

MATERIAL:

- STANDARD: pocinkana pločevina Magnelis
- OPCIJA:
 - nerjaveča pločevina INOX AISI 304 SB
 - nerjaveča pločevina INOX AISI 304 SIJAJ
 - nerjaveča pločevina INOX AISI 316 SB

BARVA: bela barva RAL 9010 MAT ali poljubna barva po RAL lestvici

MONTAŽA: pritrditev z enim centralnim ali štirimi stranskimi vijaki na komoro tipa PB-2

DESCRIPTION:

The VD-5 swirl diffuser can be used for various ceiling heights from 2.6 m to 4 m. It is suitable for installation in dropped ceilings.

CONSTRUCTION:

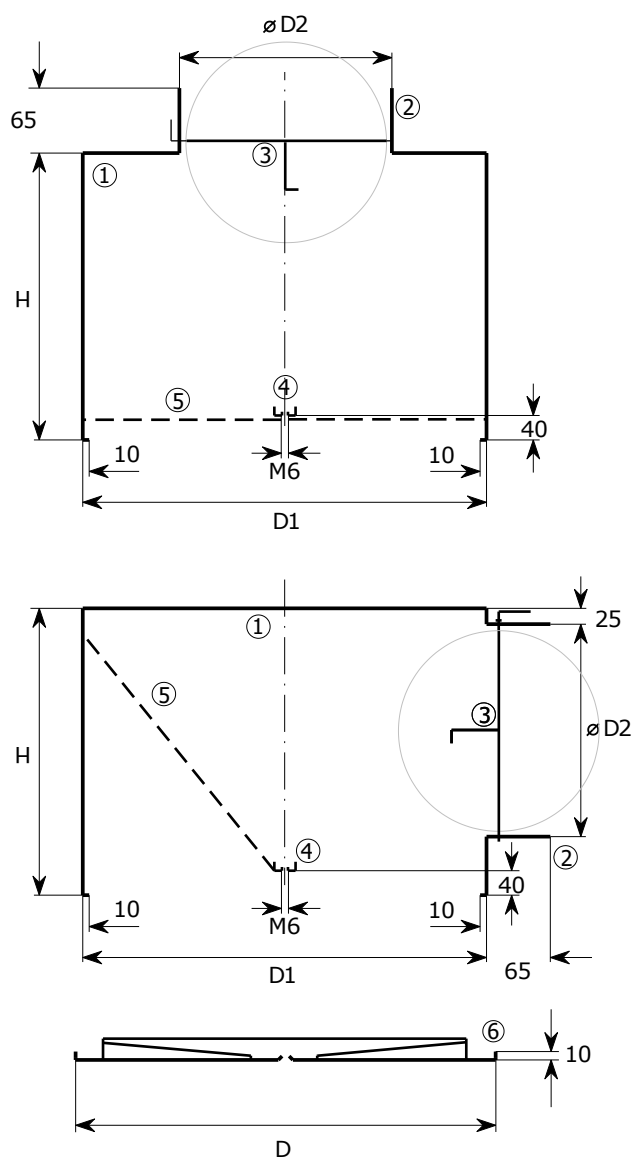
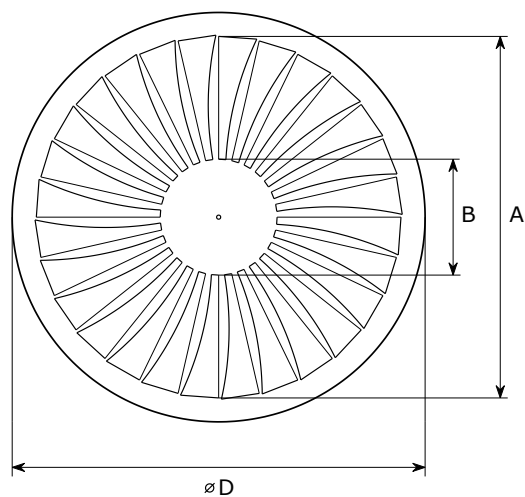
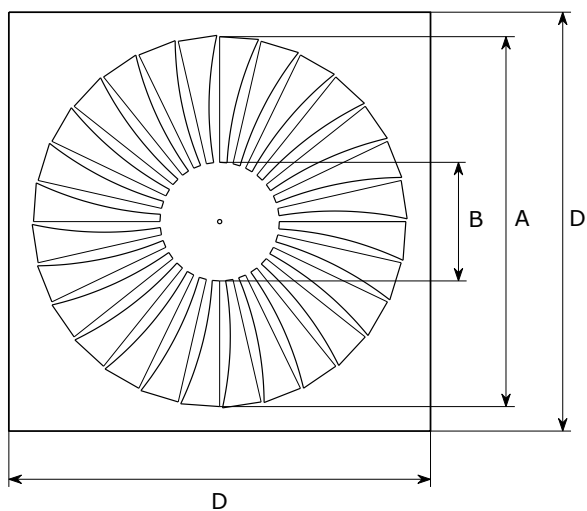
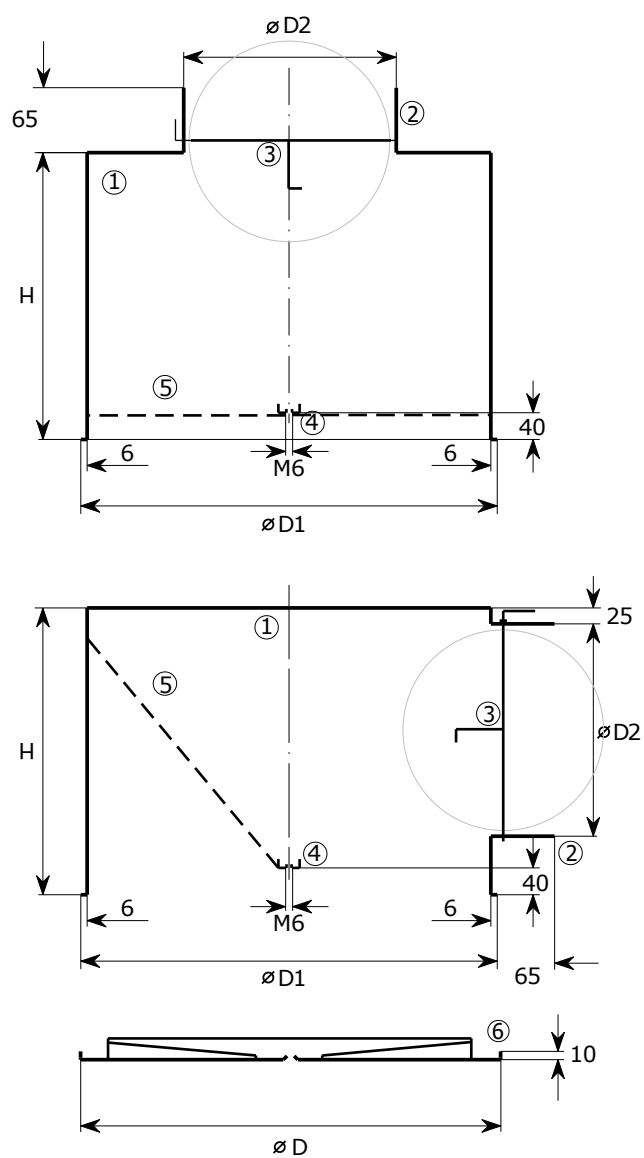
- square or round diffuser
- fixed blades
- radial blade arrangement
- guidance ring

MATERIAL:

- STANDARD: galvanized sheet metal - Magnelis
- OPTION:
 - stainless steel sheet metal INOX AISI 304 SB
 - stainless steel sheet metal INOX AISI 304 GLOSS
 - stainless steel sheet metal INOX AISI 316 SB

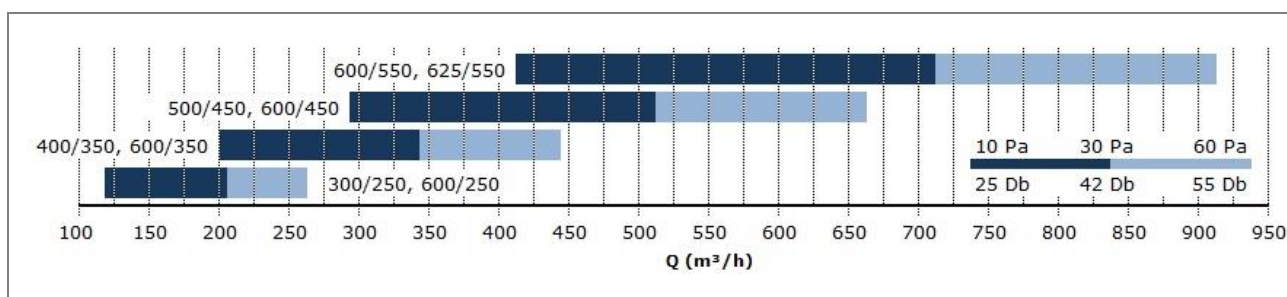
FINISH: RAL 9010 MAT white, or any colour from the RAL palette

INSTALLATION: with one central screw on the plenum box PB-2

DIMENZIJE / DIMENSIONS:**K** - kvadratna / square**R** - okrogla / round

1. komora PB-2
plenum PB-2
2. okrogla priključna
odprtina
round connection opening
3. regulacijska loputka
volume control damper
4. prečka
traverse
5. perforirana razpršilna
plošča
perforated dispersing
plate
6. difuzor
diffuser

	D	Ø D	B	A	D1	Ø D2	H
300/250	295	300	80	240	291	158	230
400/350	395	400	85	340	391	158	198
500/450	495	500	140	440	491	198	248
600/250	595	600	80	240	291	158	230
600/350	595	600	85	340	391	158	198
600/450	595	600	140	440	491	198	248
600/550	595	600	170	540	591	198	248
625/550	620	625	170	540	591	198	248

HITRA IZBIRA / FAST SELECTION:**NAČIN NAROČANJA / HOW TO ORDER:**

VD-5	K	600	/	550	RAL 9010 MAT	PB-2	PP	600	/	200	H	ISO 6mm
												izolacija / insulation 6 mm, 10 mm, 19 mm
												pozicija priključka position of connection H – horizontalen / horizontal V – vertikalni / vertical
												priključek / connection opening standard 200, 250 poljuben / optional
												dimenzija komore / plenum dimension perforirana razpršilna plošča / dispersing plate
												komora / plenum PB2 komora / plenum
												material in barva / material and colour Standard: ZN + RAL 9010 MAT Options: INOX 304 SB INOX 304 gloss INOX 316 SB
												velikost lamelnega dela / dimension of blade area 250,350,450,550
												dimenzija difuzorja / diffuser dimension 300, 400, 500, 600, 625
												oblika / shape K - kvadratna / square R - okrogla / round
												tip difuzorja / diffuser type