



PB-4

PRIKLJUČNA KOMORA ZA VARIABILNI VRTINČNI DIFUZOR PLENUM BOX FOR VARIABLE SWIRL DIFFUSER

OPIS:

Priključna komora PB-4 se uporablja v kombinaciji z difuzorji tipa ED in VSD-1. Komora je ozke in visoke oblike zato je primerna za vgradnjo v objekte z visokimi stropi.

KONSTRUKCIJA: Komora je valjaste oblike z okroglo priključno odprtino na vertikalni ali horizontalni poziciji in obešali za pritrditev komore pod strop.

MATERIAL:

- pocinkana pločevina
- nerjaveča pločevina INOX AISI 304

DODATKI:

Na zahtevo kupca se komori lahko dodajo:

1. prečka z M6 matico za pritrditev difuzorja
2. perforirana razpršilna plošča
3. loputa z zunanjo in notranjo ročico
4. tesnilni obroč na priključku
5. izolacija 6, 10, 13 ali 19 mm na zunanji strani ohišja
6. izolacija 6, 10, 13 ali 19 mm na notranji strani ohišja

DESCRIPTION:

Plenum box PB-4 is used as supplement to variable swirl diffusers VSD-1 and diffuser ED. It is suitable for high ceilings.

CONSTRUCTION: The plenum box consists of a round casing, a round connection opening at horizontal or vertical positions and hangers for montage under the ceiling.



MATERIAL:


- galvanized sheet metal
- stainless steel sheet metal INOX AISI 304

SUPPLEMENTS:

Per customer's request, the following can be added:

1. traverse for mounting the diffuser
2. perforated dispersing plate
3. damper with handle inside and outside
4. sealing ring on the connection opening
5. insulation 6, 10, 13 or 19 mm on the outside of the casing
6. insulation 6, 10, 13 or 19 mm on the inside of the casing

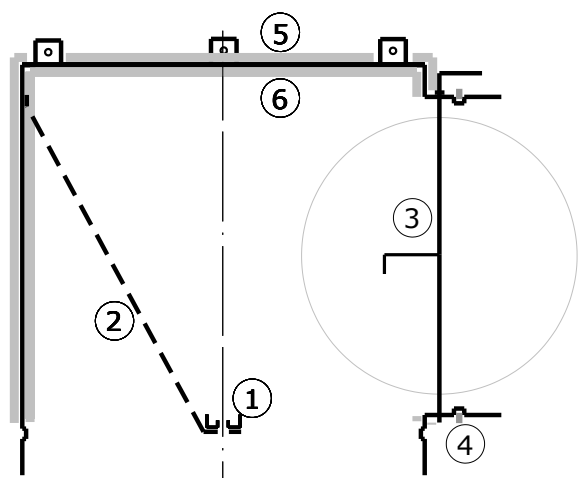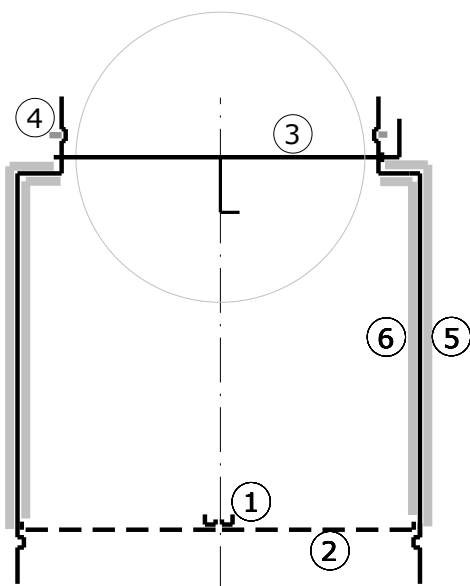

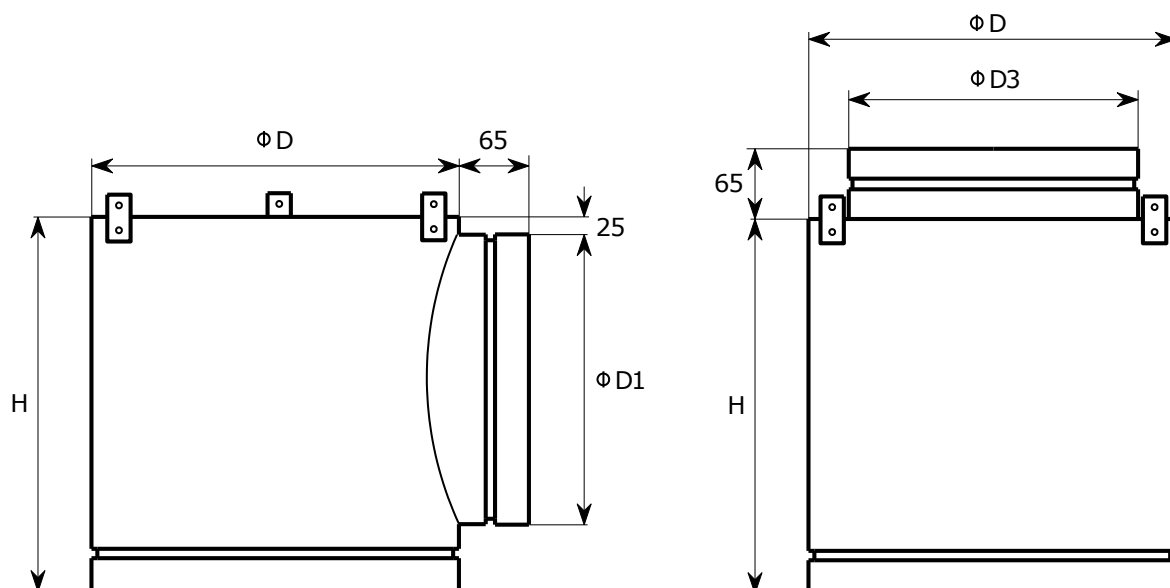DIMENZIJE / DIMENSIONS:

	ΦD	$\Phi D1$		H	
125	125	98		208	
160	160	123	158	223	258
180	180	158		258	
200	200	158	198	258	298
250	250	198	248	298	348
315	315	248	313	348	413
355	355	313		413	
400	400	313	398	413	498
500	500	398		498	

NAČIN NAROČANJA / HOW TO ORDER:

PB-4	$\Phi 250$	/	$\Phi 198$	H	ISO 6mm
					dodatki / supplements PR - prečka / traverse L - loputka / damper PP - perforacija / perforated plate ISO - izolacija / insulation 6 mm, 10 mm, 13 mm, 19 mm LD - gumijasto tesnilo / rubber seal pozicija priključka / connection position H – horizontalen / horizontal V – vertikalni / vertical priključek / connection opening standard poljuben / optional dimenzija / dimension 125, 160, 180, 200, 250, 315, 355, 400, 500 tip komore / plenum box type