



OZL

OKROGLA ZRAKOTESNA LOPUTA ROUND AIRTIGHT DAMPER

OPIS:

Zrakotesne lopute se uporabljajo za zapiranje dovoda ali odvoda zraka pri prezračevalnih sistemih, ki morajo zagotoviti visoko stanje čistosti v prostoru. Puščanje zraka ustreza razredu II po VDI 3803 ali DIN 24194, del 2.

KONSTRUKCIJA:

- okroglo ohišje
- lamela ovalne oblike z gumijastim tesnilom na obodu
- ročna ali elektromotorna nastavitev lamel

MATERIAL:

- pocinkana pločevina
- nerjaveča pločevina INOX AISI 304

DODATKI:

- gumijasta tesnila v utorih na ohišju
- BELIMO elektro motor:
 - LM24A
 - NM24A
 - LM24A SR
 - NM24A SR
 - LM230A
 - NM230A
 - LM230A SR
 - NM230A SR

DESCRIPTION:

Airtight damper is used for the closing of air flow in ventilation systems that must ensure a high degree of air purity in the ventilated areas. According to VDI 3803 or DIN 24194, part 2 air leakage flow complies with Class II.

CONSTRUCTION:

- round casing
- oval shaped damper blade with rubber seal
- manual or electromotor control mechanism

MATERIAL:

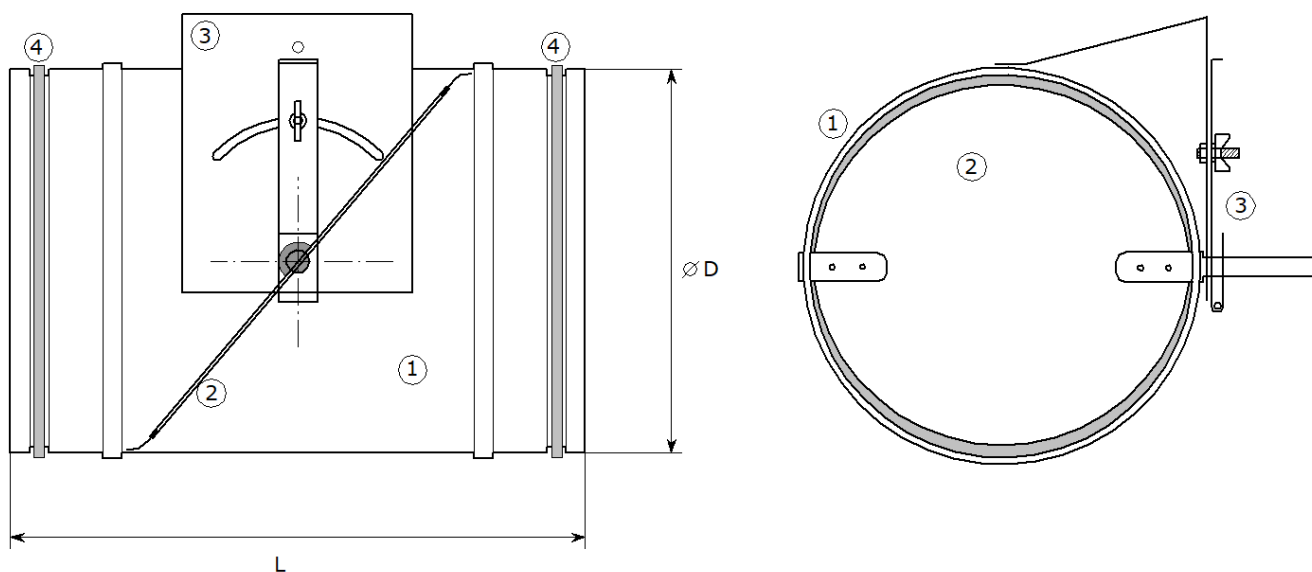
- galvanized sheet metal
- stainless steel sheet metal INOX AISI 304

SUPPLEMENTS:

- seal rubber rings in grooves on the casing
- BELIMO electric drive:
 - LM24A
 - NM24A
 - LM24A SR
 - NM24A SR
 - LM230A
 - NM230A
 - LM230A SR
 - NM230A SR

OBMOČJE UPORABE ELEKTROMOTORJEV / APPLICATION RANGE FOR ACTUATORS:

velikost / size	100	125	140	160	180	200	250	315	355
motor / actuator	LM						NM		

**DIMENZIJE / DIMENSIONS:**

	Ø D	L
100	98	300
125	123	
140	138	
160	158	
180	178	
200	198	
250	248	400
315	313	
355	353	500
400	398	

1. ohišje / casing
2. lamela / blade
3. nosilec ročice ali pogona / handle or actuator bracket
4. gumijasti tesnilni obroč / seal rubber ring

NAČIN NAROČANJA / HOW TO ORDER:

OZL	315	E + LM230A	
			dodatki / supplements LD - gumijasto tesnilo / rubber seal
			pogon / drive R - centralni ročni pogon / central manual drive E - pripravljeno za elektromotorni pogon / ready for electromotor drive E + BELIMO ... - montiran elektromotorni pogon / mounted electromotor drive
			dimenzija / dimension standard 100, 125, 140, 160, 180, 200, 250, 315, 355, 400 poljubna / optional
			tip lopute / type of damper