




PP-RV

PERFORIRANA REVIZIJSKA REŠETKA PERFORATED REVISION GRILLE

OPIS:

Perforirana revizijska rešetka je namenjena odvodu zraka iz prostora ali dovodu zraka v prostor. Primerna je za vgradnjo v spuščene stropove. Klik ali ključavnica mehanizem omogočata enostavno odpiranje in dostop do med stropovja.

KONSTRUKCIJA:

Okvir in frontalna plošča s perforacijo po izbiri:

- 54 %, luknjice fi 6 mm (standard)
- 38 % ali 43% perforacija, luknjice fi 6 mm
- 69 % perforacija, luknjice 10x10 mm
- 77 % perforacija, luknjice 15x15 mm
- Satje 9x10,

Rešetka se odpre okoli osi po daljši stranici. Zapre se s:

- klik mehanizem – skrito (standard)
- ključavnica – vidno (opcija)

MATERIAL:

- pocinkana pločevina (standard)
- nerjaveča pločevina INOX AISI 304 B2

BARVA:

bela barva RAL 9010 MAT (standard) ali poljubna barva po RAL lestvici

DODATKI:

- kofil filter G2 ali G3, položen na notranji del frontalne plošče in fiksiran s profilom
- varovalna vrstica
- komora PB
- komora PB z loputo



S – varovalna vrstica / safety cord

DESCRIPTION:

The perforated revision grille is designed to exhaust air from the room or intake air to the room. It is suitable for installation in dropped ceilings. A click or lock mechanism allows for easy opening and access to the plenum space.

CONSTRUCTION:

Frame and front panel with following perforation options:

- 54 %, fi 6 mm holes (standard)
- 38% or 43% perforation, fi 6 mm holes
- 69 % perforation, 10x10 mm holes
- 77 % perforation, 15x15 mm holes
- Honeycomb 9x10,

The grille opens around the axis along the longer side. It closes with:

- click mechanism – hidden (standard)
- lock – visible (optional)

MATERIAL:

- galvanized sheet metal (standard)
- stainless steel sheet metal INOX AISI 304 B2

FINISH:

RAL 9010 MAT white (standard), or any colour from the RAL palette

SUPPLEMENTS:

- G2 or G3 filter, placed on the inner side of the front panel and fixed with a profile
- safety cord
- PB plenum
- PB plenum with a damper



KLIK - zapiranje s klik mehanizmom
closing with click mechanism






KLJUČ – zapiranje s ključavnico
closing with lock mechanism

DIMENZIJE / DIMENSIONS:

Standardne dimenzije / standard dimensions:


B=300, 400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1300 mm

H=300, 400, 500, 600 mm;

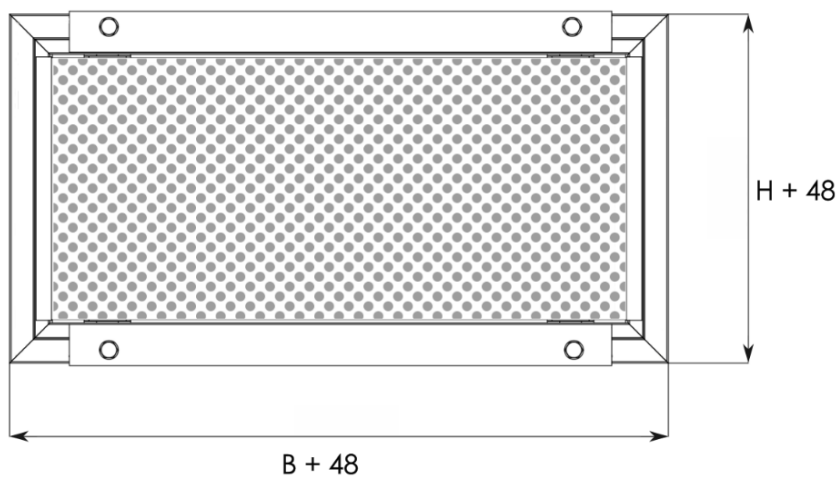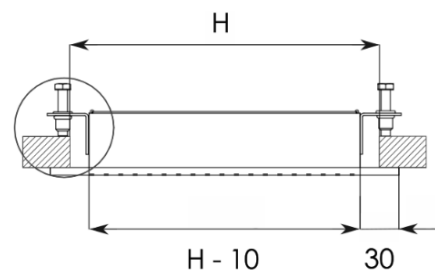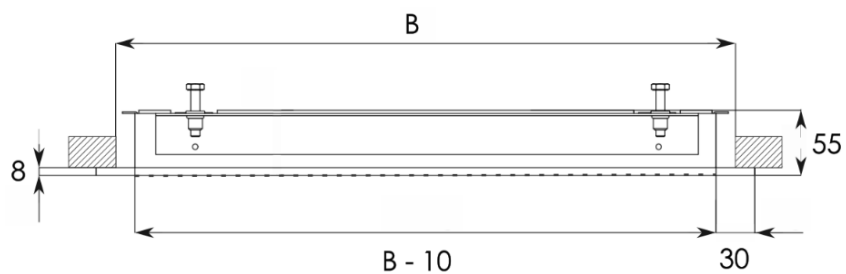

MONTAŽA / INSTALLATION:

Skrita pritrditev na spuščeni strop z uporabo kotnikov in z vijaki M6 (standard)
 Concealed fixing to dropped ceiling using angles and M6 screws (standard)



Montaža na komoro / Installation on plenum box

**NAČIN NAROČANJA / HOW TO ORDER:**

PP-RV	PP 6-54	600	300	ZN	RAL 9010 MAT	klik	G3 S
							dodatki / supplements G2 – filter G3 – filter S – varovalna vrvica / safety cord PB – komora / plenum box način zapiranja / lock system KLIK – klik mehanizem / click mechanism KLJUČ – ključavnica / lock mechanism
					barva / finish standard RAL 9010 MAT material ZN (standard) INOX AISI 304		
					dimenzija h / dimension h standard 300, 400, 500, 600 mm dimenzija b / dimension b standard 300, 400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1300 mm		
	tip perforacije / perforation type PP 6-54 PP 6-43 PP 6-38 PP 10x10-69 PP 15x15-77 PP ...						
	tip rešetke / grill type						