



SKR

SPIROKANALSKA REŠETKA TUBE SLOT GRILL

OPIS:

Spiro kanalska rešetka je primerna za dovajanje toplega in hladnega zraka v večje prostore (telovadnice, dvorane, industrijske hale...)

KONSTRUKCIJA:

- rešetka
- poljubno število rež
- črni plastični usmerniki zraka

DODATKI:

- na željo kupca se vgradi regulator količine zraka. Regulator se nastavlja s pomočjo izvijača skozi režo.
- v kolikor je v liniji vgrajenih več spiro kanalskih rešetk brez regulatorja, priporočamo, da se med njimi vgradijo enostavne regulacijske lopute

MATERIAL: pocinkana pločevina

BARVA: bela barva RAL 9010 MAT ali na željo kupca poljubna barva po RAL lestvici

MONTAŽA: rešetka se z vijaki pritrdi na pravokotno odprtino prezračevalne cevi

DESCRIPTION:

The tube slot grill is suitable for the supply of warm and cold air to larger areas (e.g. of gymnasiums, conference and industrial halls).

CONSTRUCTION:

- the grill
- optional numbers of slots
- black plastic air deflector elements

SUPPLEMENTS:

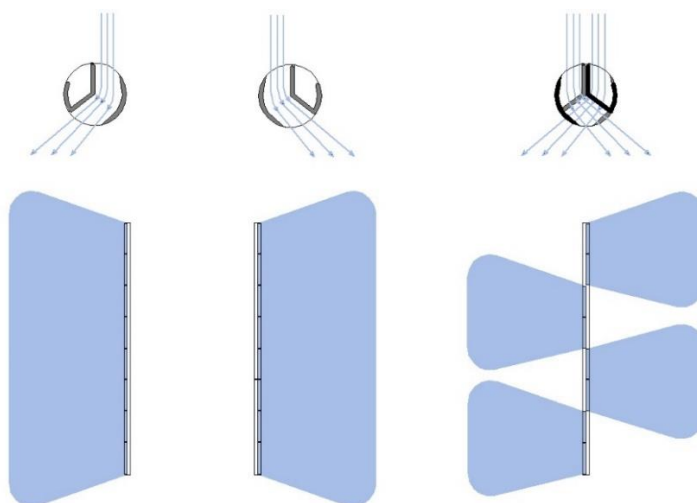
- air volume regulator is installed on customer's request. Regulator is adjusted with a screwdriver through a slot.
- damper is recommended for installation with several tube slot grills without regulator in one line

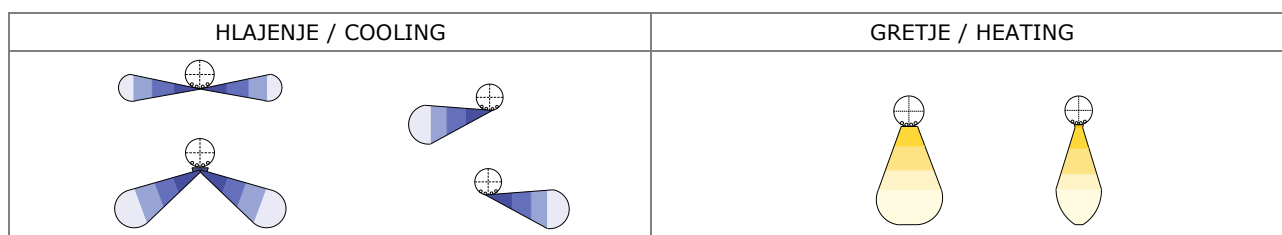
MATERIAL: galvanized sheet metal

POWDER COATING: white RAL 9010 MAT or can be any RAL colour according to the customer's request.

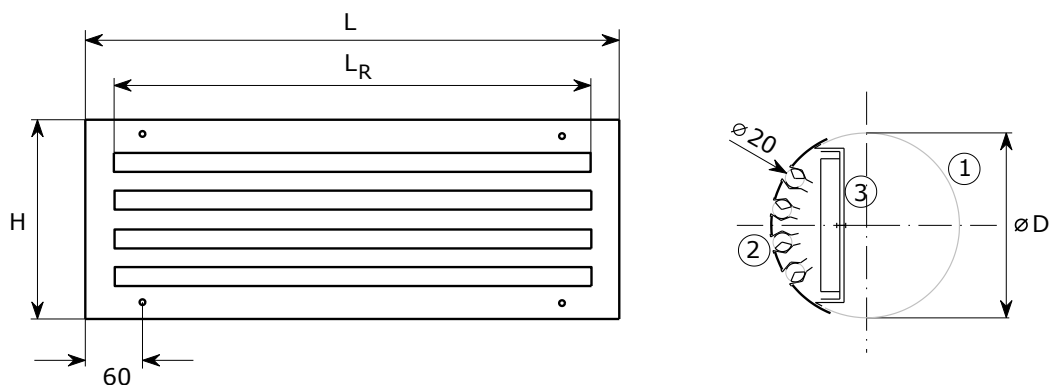
INSTALLATION: the grille is screw on square opening on the round duct.

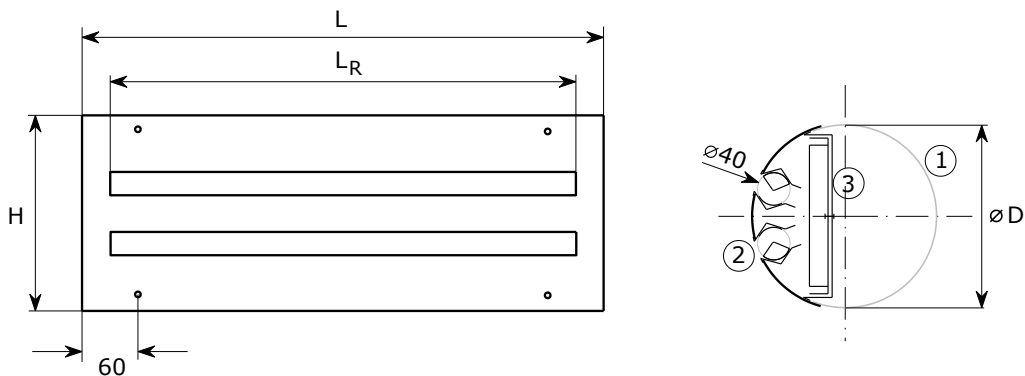
SMER VPIHA / AIR INTAKE DIRECTION:



**DIMENZIJE / DIMENSIONS:**

Tip /type	L	L _R	Ø D	število rež number of slots	H	dimenzija odprtine opening dimension
SKR-20	580	500	150 – 250	1-4	(število rež x 40) + 60 (No. of slots x 40) + 60	L-35 x H-35
			280 – 315	1-6		
			355 – 400	1-8		
			500 – 900	1-10		
	680	600	150 – 250	1-4		
			280 – 315	1-6		
			355 – 400	1-8		
			500 – 900	1-10		
	880	800	150 – 250	1-4		
			280 – 315	1-6		
			355 – 400	1-8		
			500 – 900	1-10		
SKR-40	580	500	150 – 200	1-2	(število rež x 40) + 60 (No. of slots x 40) + 60	L-35 x H-35
			250 – 400	1-6		
			500 – 900	1-8		
	680	600	150 – 250	1-2		
			280 – 315	1-2		
			500 – 900	1-8		
	880	800	150 – 250	1-2		
			280 – 315	1-4		
			500 – 900	1-8		
			500 – 900	1-8		

SKR-20

SKR-40

1. cev / tube
2. plastični usmerniki zraka / plastic air deflector
3. regulator pretoka zraka / air volume regulator

TEHNIČNI PODATKI / TECHNICAL DATA:

	L reže L of slot	Število rež No. of slots	Priporočen pretok zraka / Recommended air flow volume [m³/h]			
			Ø150 - Ø250	Ø280 - Ø315	Ø355 - Ø400	Ø450 - Ø900
SKR-20	500	1	38	38	38	38
		2	75	75	75	75
		3	113	113	113	113
		4	150	150	150	150
		6		225	225	225
		8			300	300
		10				375
	600	1	45	45	45	45
		2	90	90	90	90
		3	135	135	135	135
		4	180	180	180	180
		6		270	270	270
		8			360	360
		10				450
	800	1	60	60	60	60
		2	120	120	120	120
		3	180	180	180	180
		4	240	240	240	240
		6		360	360	360
		8			480	480
		10				600

Priporočen pretok zraka je 75 m³/h na meter aktivne dolžine reže. $V_{ef}=2,5$ m/s

The recommended air flow rate is 75 m³/h per metre of active slot length. $V_{ef}=2,5$ m/s

	L reže L of slot	Število rež No. of slots	Priporočen pretok zraka / Recommended air flow volume [m³/h]			
			Ø150 - Ø200	Ø250 - Ø355	Ø400 - Ø450	Ø450 - Ø900
SKR-40	500	1	75	75	75	75
		2	150	150	150	150
		3		225	225	225
		4		300	300	300
		6			450	450
		8				600
	600	1	90	90	90	90
		2	180	180	180	180
		3		270	270	270
		4		360	360	360
		6			540	540
		8				720
	800	1	120	120	120	120
		2	240	240	240	240
		3		360	360	360
		4		480	480	480
		6			720	720
		8				960

Priporočen pretok zraka je 150 m³/h na meter aktivne dolžine reže. Vef=2,5 m/s

The recommended air flow rate is 150 m³/h per metre of active slot length. Vef=2,5 m/s

NAČIN NAROČANJA / HOW TO ORDER:

SKR-20	315	/	2	REGULATOR	ZN	RAL 9010
						barva / colour standard RAL 9010 optional
						material: standard ZN opcija / optional AL, INOX
						dodatki / supplements: regulator pretoka zraka / air volume regulator
						število rež / number of slots
						dimenzija cevi / tube dimension
tip / type SKR-20 SKR-40						