



RZI

ISTOSMERNNA REGULACIJSKA ŽALUZIJA PARALLEL-ACTION VOLUME CONTROL LOUVRE

OPIS:

Istosmerne regulacijske žaluzije se uporabljajo za regulacijo pretoka zraka in tlaka v prezračevalnih kanalih in napravah. V prezračevalni sistem so nameščene samostojno ali v kombinaciji z zaščitnimi rešetkami ali nihalnimi žaluzijami. Temperaturno območje delovanje je do 200 °C ker so brez vgrajenih PVC delov.

KONSTRUKCIJA:

- nosilni okvir
- horizontalne lamele, ki se premikajo s pomočjo kovinskega mehanizma
- nosilec za ročico ali elektromotorni pogon

MATERIAL:

- pocinkana pločevina,
- nerjaveča pločevina

TIP POGONA:

- C - ročna nastavitvev z ročico
- E - pripravljen za montažo elektro pogona
- E + BELIMO ... - na željo kupca se na ohišje namesti izbrani Belimo pogon:
 - LM230A (ON -OFF)
 - LM24A (ON -OFF)
 - LM230A SR
 - LM24A SR
 - NM230A (ON -OFF)
 - NM24A (ON -OFF)
 - NM230A SR
 - NM24A SR
 - SM230A (ON -OFF)
 - SM24A (ON -OFF)
 - SM230A SR
 - SM24A SR

MONTAŽA: vgradnja s prirobnico na kanal

DESCRIPTION:

The parallel-action volume control louver is used in air conditioning systems for air flow adjustment and control of pressure in rectangular ducts and air handling units. They are installed as independent devices or in combination with protection or overpressure louvers. The operating temperature range is up to 200 °C because there are no PVC parts installed.

CONSTRUCTION:

- supporting frame
- horizontal parallel-action blades controlled by metal mechanism
- bracket for handle or electromotor drive

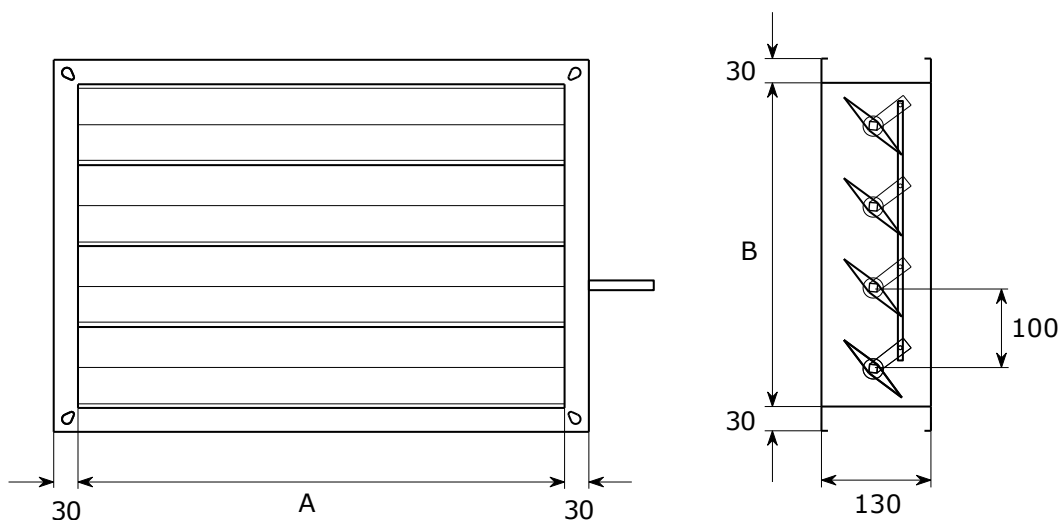
MATERIAL:

- galvanized sheet metal
- stainless-steel sheet metal

TYPE OF DRIVE:

- C - manual adjustment with handle
- E - ready for electric drive
- E + BELIMO ... - upon request the Belimo actuator can be added on the frame:
 - LM230A (ON -OFF)
 - LM24A (ON -OFF)
 - LM230A SR
 - LM24A SR
 - NM230A (ON -OFF)
 - NM24A (ON -OFF)
 - NM230A SR
 - NM24A SR
 - SM230A (ON -OFF)
 - SM24A (ON -OFF)
 - SM230A SR
 - SM24A SR

INSTALLATION: with flange on the duct

DIMENZIJE / DIMENSIONS:

RZI žaluzije izdelujemo v poljubnih kombinacijah višine do 2000 mm in širine do 1200 mm.
 RZI louvres are available in any combination of heights up to 2000 mm and widths up to 1200 mm.

Območje delovanja motornih pogonov / Application range for actuators:

H/B	200	300	400	500	600	700	800	900	1000	1100	1200
200	LM										
300											
400											
500											
600											
700											
800	NM										
900											
1000											
1100											
1200											
1300											
1400											
1500											
1600											
1700											
1800											
1900											
2000											
	SM										

NAČIN NAROČANJA / HOW TO ORDER:

RZI	600	x	500	ZN	E + LM230A
------------	------------	---	------------	-----------	-------------------

pogon / drive:

R - centralni ročni pogon / central manual drive

E - pripravljeno za elektromotorni pogon / ready for electromotor drive

E + BELIMO ... - montiran elektromotorni pogon / installed electromotor drive

material

ZN, INOX

višina / height

standard 200-2000

poljubna / optional

širina / width

standard 200-1200

poljubna / optional

tip žaluzije / type of louver