



PB2

PRIKLJUČNA KOMORA
PLENUM BOX

OPIS:

Komora PB2 se večinoma uporablja v kombinaciji z vrtničnimi difuzorji tipa VD, PP, LD-K.

KONSTRUKCIJA:

- kvadratno ali okroglo ohišje
- okrogla priključna odprtina na horizontalni ali vertikalni poziciji
- prečka za pritrditev difuzorja
- regulacijska loputka
- dovodna komora ima perforirano razpršilno ploščo, odvodna je brez

MATERIAL: pocinkana pločevina

DODATKI: izolacija 6, 10 ali 19mm znotraj ali zunaj ohišja

DESCRIPTION:

Plenum PB2 is used as supplement to swirl diffusers type VD, PP, LD-K.

CONSTRUCTION:



- round or square casing
- round connection opening at horizontal or vertical positions
- traverse for mounting the diffuser
- regulation damper
- perforated dispersing plate only on supply plenum

MATERIAL: galvanized sheet metal



SUPPLEMENTS: insulation 6, 10 or 19 mm on the inner side or outside of the casing

DIMENZIJE / DIMENSIONS:

PB 2K kvadratna / square

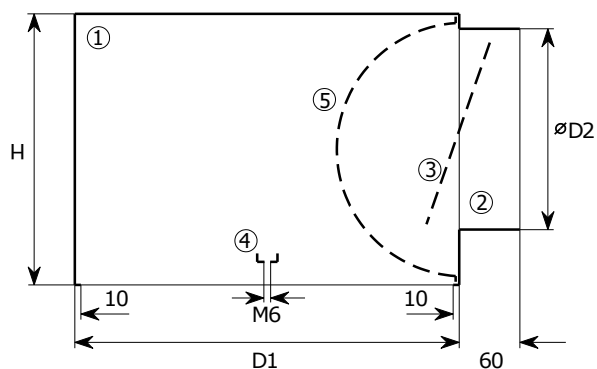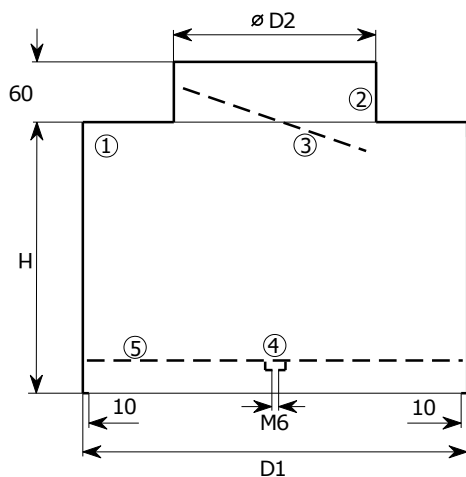

PB 2R okrogla / round

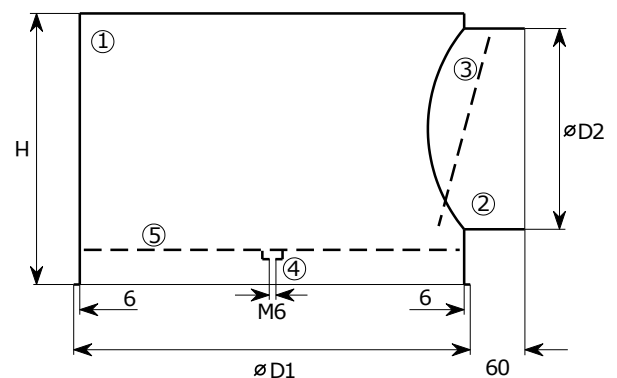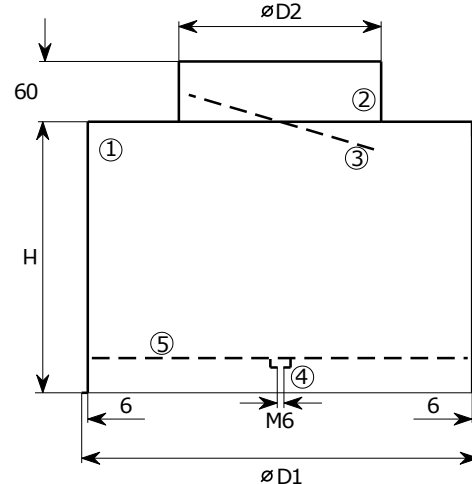

	D1	H		Ø D2	
300	291	230	270	158	198
400	391	230	270	158	198
500	491	270	320	198	248
600	591	270	320	198	248
800	791	385	420	313	348

1. ohišje / casing
2. priključna odprtina / air connection opening
3. loputa / damper
4. prečka / traverse
5. perforirana razpršilna plošča / perforated dispersing plate

NAČIN NAROČANJA / HOW TO ORDER:

PB 2	600	/	198	H	PP, ISO 6mm
-------------	------------	---	------------	----------	--------------------

dodatki / supplements

ISO - izolacija / insulation 6mm, 10mm, 19mm

PP - perforirana razpršilna plošča / perforated dispersing plate

pozicija priključka / connection position

H - horizontalen / horizontal

V - vertikalni / vertical

priključek / connection opening

standard

poljuben / optional

dimenzija / dimension

300, 400, 500, 600, 800

tip komore / plenum box type