

RS

STREŠNI PODSTAVEK
ROOF SOCKET**KONSTRUKCIJA:**

- kvadratno ohišje
- termična in akustična izolacija z notranje strani z mineralno volno debeline 50 mm prevlečeno s tkanino, ki preprečuje odnašanje vlaken
- kvadratna pritrdilna plošča za ravno streho
- profili za pritrditev pri podstavku za poševno streho

MATERIAL:

- ZN - pocinkana pločevina
- AL - aluminijasta pločevina

DODATKI:

- perforirana pločevina preko mineralne volne kot ognjevarna zaščita do temperature 600°C
- plošča za pritrditev lopute
- loputa
- dušilne kulise

CONSTRUCTION:

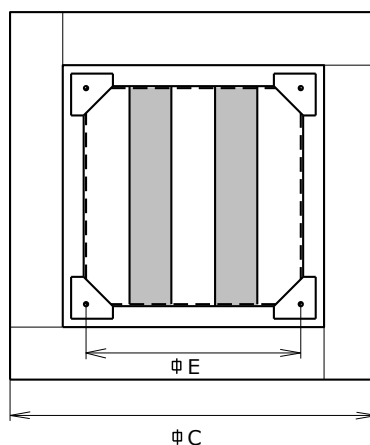
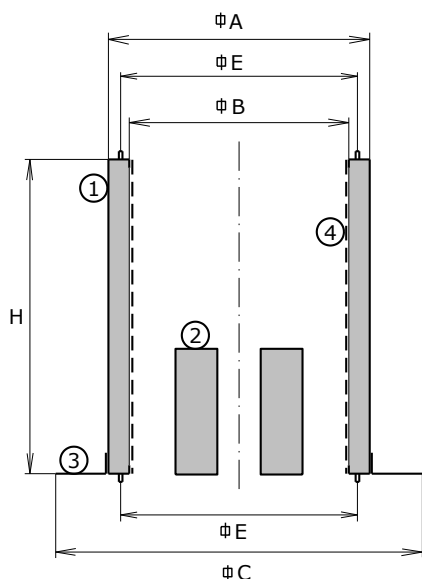
- square casing
- thermal and acoustic insulation on the inner side with 50mm mineral wool
- square mounting plate for flat roof socket
- mounting profile for inclined roof socket

MATERIAL:

- ZN - galvanized sheet metal
- AL - aluminium sheet metal

SUPPLEMENTS:

- a perforated sheet metal for burn prevention, up to 600°C is added over the mineral wool
- plate for damper mounting
- damper
- acoustic panels

DIMENZIJE / DIMENSIONS:

1. izolirano ohišje 50mm
isolated casing 50mm
2. dušilna kulisa
acoustic panel
3. plošča za ravno streho
plate for flat roof
4. perforirana pločevina za
ognjevarno zaščito
perforated plate for burn
prevention

dim	A	B	C	E*	H
290	290	188	470	245	300 or 750
395	395	293	600	330	300 or 750
545	545	443	725	450	300 or 750
615	615	513	795	535	300 or 750
695	695	593	875	590	300 or 1000
885	885	783	1065	750	300 or 1000
1080	1080	978	1260	840	300 or 1000

* dimenzija se lahko prilagodi potrebam kupca / dimensions can be adjusted to the needs of customer

NAČIN NAROČANJA / HOW TO ORDER:

RS	615	/	750	ZN	dušilne kulise
					<p>dodatki / supplements dušilne kulise / acoustic panels perforirana plošča / perforated plate plošča za pritrditev lopute / plate for damper mounting loputa / damper</p> <p>material ZN, AL</p> <p>višina / height standard poljubna / optional</p> <p>dimenzija / dimension standard 290, 395, 545, 615, 695, 885, 1080 poljubna / optional</p> <p>tip / type</p>