



PB-2

PRIKLJUČNA KOMORA ZA VRTINČNI DIFUZOR PLENUM BOX FOR SWIRL DIFFUSER

OPIS:

Priključna komora PB-2 se uporablja v kombinaciji z vrtinčnimi difuzorji tipa VD in PP.

KONSTRUKCIJA:

- kvadratno ali okroglo ohišje
- okrogla priključna odprtina na horizontalni ali vertikalni poziciji
- prečka za pritrditev difuzorja
- regulacijska loputka z ročico znotraj in zunaj
- dovodna komora ima perforirano razpršilno ploščo, odvodna je brez

MATERIAL: pocinkana pločevina

DODATKI: izolacija 6, 10, 13 ali 19 mm znotraj ali zunaj ohišja

DESCRIPTION:

Plenum box PB-2 is used as supplement to swirl diffusers type VD and PP.

CONSTRUCTION:

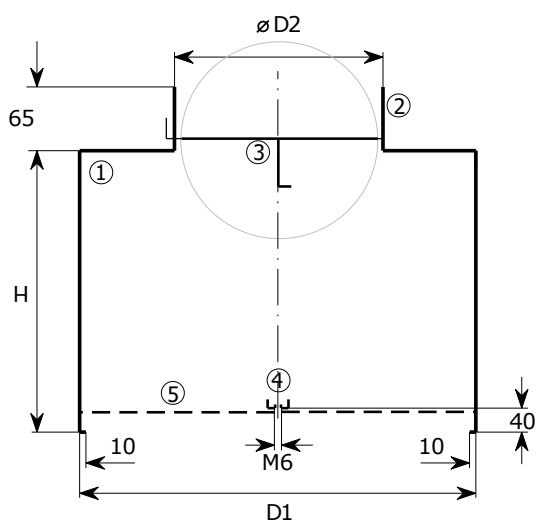
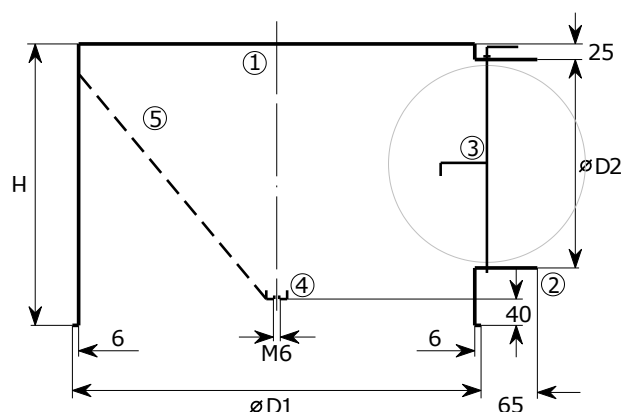
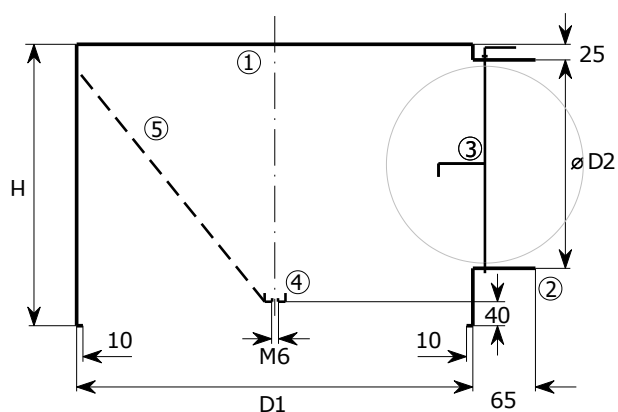
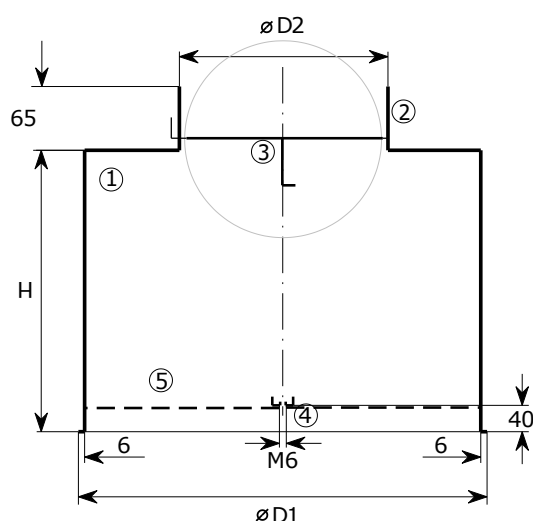
- round or square casing
- round connection opening at horizontal or vertical position
- traverse for mounting the diffuser
- regulation damper with handle inside and outside
- perforated dispersing plate only on supply plenum

MATERIAL: galvanized sheet metal

SUPPLEMENTS: insulation 6, 10, 13 or 19 mm on the inner side or outside of the casing

DIMENZIJE / DIMENSIONS:

	D1	H		Ø D2	
300	291	230	270	158	198
400	391	230	270	158	198
500	491	270	320	198	248
600	591	270	320	198	248
800	791	385	420	313	348

PB-2K kvadratna / square**PB-2R** okrogla / round

1. ohišje / casing
2. priključna odprtina / air connection opening
3. loputa / damper
4. prečka / traverse
5. perforirana razpršilna plošča / perforated dispersing plate

NAČIN NAROČANJA / HOW TO ORDER:

PB-2	R	600	/	198	H	PP, ISO 6mm
						dodatki / supplements ISO - izolacija / insulation 6 mm, 10 mm, 13 mm, 19 mm PP - perforirana razpršilna plošča / perforated dispersing plate LD - gumijasto tesnilo / rubber seal pozicija priključka / connection position H - horizontalen / horizontal V - vertikalni / vertical priključek / connection opening standard poljuben / optional dimenzija / dimension 300, 400, 500, 600, 800 oblika komore / plenum box shape R - okrogla / round K - kvadratna / square tip komore / plenum box type