



LM-2

LOVILEC MAŠČOB GREASE TRAP

OPIS:

Lovilec maščob uporabljamo pri odvodu zraka iz kuhinj in prostorov, kjer se v zraku nahaja veliko mastne pare. Z vgrajenim maščobnim filtrom zmanjšamo onesnaževanje zračnih kanalov in ventilatorjev.

KONSTRUKCIJA:

- nosilni okvir
- maščobni filter iz ekspanzirane aluminijaste mreže
- lovilna kad

MATERIAL: pocinkana pločevina ali na željo kupca nerjaveča pločevina

BARVA: bela barva RAL 9010 MAT ali poljubna barva po RAL lestvici

MONTAŽA:

- z vijaki direktno na kanal
- v strop z vgradnim okvirom ali direktno z vijaki

DESCRIPTION:

Grease trap is used to extract air from kitchens and rooms with a high level of greasy steam. A grease filter reduces the soiling of air ducts and ventilators.

CONSTRUCTION:

- supporting frame
- grease filter made from expanded aluminium net
- trap tub




MATERIAL: galvanized sheet metal or at the customer's request stainless sheet metal

FINISH: RAL 9010 MAT white, or any colour from the RAL palette

INSTALLATION:

- on duct with screws
- in the ceiling with build-in frame or with screws

DIMENZIJE / DIMENSIONS:

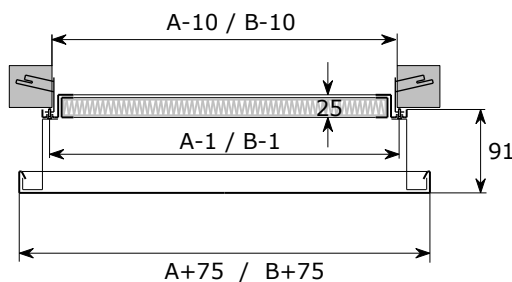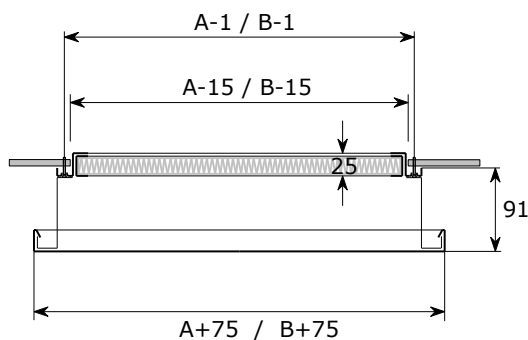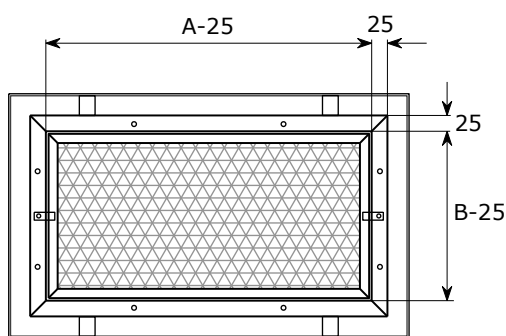

Standardne širine (A) / standard width: 425, 625, 825, 1025
Standardne višine (B) / standard height: 125, 225, 325, 425

HITRA IZBIRA / FAST SELECTION:

A/B	125	225	325	425	525
225	47	110	173	236	299
325	74	173	272	371	470
425	101	236	371	506	641
525	128	299	470	641	812
625	155	362	569	776	983
725	182	425	668	911	1154
825	209	488	767	1046	1325

m3/h

Hitrost Aef=1 m/s Tlak 10 Pa

A/B	125	225	325	425	525
225	95	221	347	473	599
325	149	347	545	743	941
425	203	473	743	1013	1283
525	257	599	941	1283	1625
625	311	725	1139	1553	1967
725	365	851	1337	1823	2309
825	419	977	1535	2093	2651

m3/h

Hitrost Aef=2 m/s Tlak 37 Pa

NAČIN NAROČANJA / HOW TO ORDER:

LM-2	425	x	225	ZN	RAL 9010 MAT
					barva / colour standard RAL 9010 MAT poljubno / optional material standard ZN OPCIJA: INOX AISI304 nerjaveča pločevina, OPTION: INOX AISI304 stainless steel sheet metal višina B/ height B standard 125, 225, 325, 425 poljubna / optional širina A/ width A standard 425, 625, 825, 1025 poljubna / optional tip rešetke / type of grille