



LD

## LINIJSKI DIFUZOR LINEAR SLOT DIFFUSER

### OPIS:

Linjski difuzor je primeren za dovajanje toplega in hladnega zraka v prostore višine 2,5 do 4m

#### KONSTRUKCIJA:

- pravokotni difuzor
- 1-4 vrste rež
- plastični usmerniki zraka

**MATERIAL:** pocinkana pločevina

**BARVA:** bela barva RAL 9010 ali na željo kupca poljubna barva po RAL lestvici

**MONTAŽA:** pritrditev z vijaki na komoro

#### DODATKI:

- komora
- izolirana komora
- loputka v priključku komore

### DESCRIPTION:

The linear slot diffuser can be used for various ceiling heights from 2.5m to 4m.

#### CONSTRUCTION:

- rectangular diffuser
- 1-4 rows of slots
- plastic deflectors

**MATERIAL:** galvanized sheet metal


**FINISH:** white RAL 9010 or can be any RAL colour according to the customer's request.

**MONTAGE:** with screws on the plenum

#### SUPPLEMENTS:

- plenum
- insulated plenum
- damper in connection opening

### DIMENZIJE / DIMENSIONS:

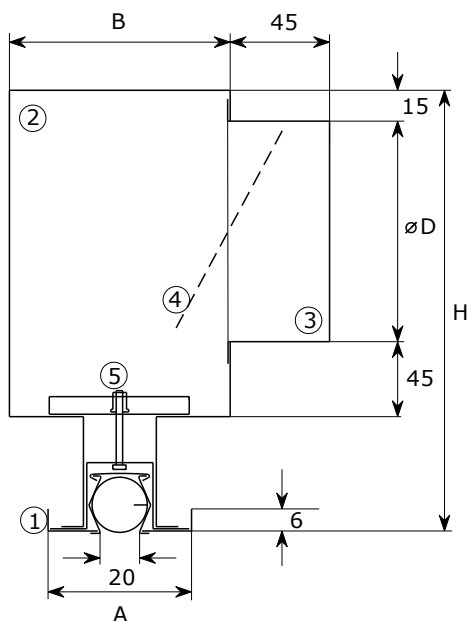

1. difuzor / diffuser
2. komora / plenum
3. priključna odprtina / connection opening
4. loputa / damper
5. pritrditev z vijaki / montage with screws

število vrst number of slots	H	A	B
1	230	65	100
2	255	95	130
3	265	125	160
4	305	155	190

### Število, premer in položaj priključkov na komori :

Number, diameter and positions of round connections on plenum box:

število rež number of slots	L=540	L=1045	L=1550	L=2055
1	1 x ø98	2 x ø98	2 x ø123	2 x ø123
2	1 x ø138	2 x ø123	2 x ø138	2 x ø138
3	1 x ø158	2 x ø138	2 x ø158	2 x ø158
4	1 x ø198	2 x ø158	2 x ø198	2 x ø198
položaj priključkov position of connections	L / 2	L / 4	L / 4	L / 4

**NAČIN NAROČANJA / HOW TO ORDER:**

LD	1045	/	2	RAL 9010	PB	L	ISO 6mm
							<b>izolacija / insulation</b> 6mm, 10mm, 19mm <b>dodatki / supplements</b> loputka v priključku / damper in connection <b>komora / plenum</b>
				<b>barva / colour</b> standard RAL 9010 optional			
				<b>število rež / number of slots</b> 1, 2, 3, 4			
				<b>dimenzija / dimension</b> standard 540, 1045, 1550, 2055 poljubno / optional			
				<b>tip difuzorja / diffuser type</b>			